

Sparkle

Under Counter Refrigerator

SPARKLE UNDER COUNTER CHILLER VERSION			
MODEL	SPARKLE 4FT	SPARKLE 6 FT	SPARKLE 8 FT
Overall Dimensions (W x D x H)	1220 X 750 X 850	1830 X 750 X 850	2400 X 750 X 850
Usage Capacity	250 L	430 L	650 L
Racks size & Qty (W x D x Qty)	550 X 415 X 2 NOS	575 X 415 X 4 NOS	625 X 415 X 6 NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	0 TO -5 °C	0 TO -5 °C	0 TO -5 °C
Refrigerant	R-134 A	R-134 A	R-134 A
Defrost	HOT GAS	HOT GAS	HOT GAS
Compressor	Kirloskar Copeland	Kirloskar Copeland	Kirloskar Copeland
Condensing unit	Plug-In	Plug-In	Plug-In
Connected Power	450 WATT	700 WATT	1300 WATT
Amps.	2.8 A	3.2 A	4.8 A
Supply Voltage	230 VAC	230 VAC	230 VAC
Nett. Wt.	67 KG	108 KG	144 KG
Packed Wt./ Gross Wt.	90 KG	132 KG	167 KG

OPTIONS AVAILABLE WITH OVERHEAD SHELVES AND FOOD WARMER AND SPLASH BACK

SPARKLE UNDER COUNTER COOLER VERSION			
MODEL	SPARKLE 4FT	SPARKLE 6 FT	SPARKLE 8 FT
Overall Dimensions (W x D x H)	1220 X 750 X 850	1830 X 750 X 850	2400 X 750 X 850
Usage Capacity	250 L	430 L	650 L
Racks size & Qty (W x D x Qty)	550 X 415 X 2 NOS	575 X 415 X 4 NOS	625 X 415 X 6 NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	2 TO 8 °C	2 TO 8 °C	2 TO 8 °C
Refrigerant	R-134 A	R-134 A	R-134 A
Defrost	AIR	AIR	AIR
Compressor	Kirloskar Copeland	Kirloskar Copeland	Kirloskar Copeland
Condensing Unit	REMOTE	REMOTE	REMOTE
Connected Power	450 WATT	700 WATT	1300 WATT
Amps.	2.8 A	3.2 A	4.8 A
Supply Voltage	230 VAC	230 VAC	230 VAC
Nett. Wt.	67 KG	108 KG	144 KG
Packed Wt./ Gross Wt.	90 KG	132 KG	167 KG

OPTIONS AVAILABLE WITH OVERHEAD SHELVES AND FOOD WARMER AND SPLASH BACK

SPARKLE UNDER COUNTER FREEZER VERSION			
MODEL	SPARKLE 4FT	SPARKLE 6 FT	SPARKLE 8 FT
Overall Dimensions (W x D x H)	1220 X 750 X 850	1830 X 750 X 850	2400 X 750 X 850
Usage Capacity	250 L	430 L	650 L
Racks size & Qty (W x D x Qty)	550 X 415 X 2 NOS	575 X 415 X 4 NOS	625 X 415 X 6 NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	-12 TO -15 °C	-12 TO -15 °C	-12 TO -15 °C
Refrigerant	R-404 A	R-404 A	R-404 A
Defrost	HOT GAS	HOT GAS	HOT GAS
Compressor	KCL/DANFOSS	KCL/DANFOSS	KCL/DANFOSS
Condensing Unit	Plug-In	Plug-In	Plug-In
Connected Power	450 WATT	700 WATT	1300 WATT
Amps.	2.8 A	3.8 A	4.8 A
Supply Voltage	230 VAC	230 VAC	230 VAC
Nett. Wt.	67 KG	108 KG	144 KG
Packed Wt./ Gross Wt.	90 KG	132 KG	167 KG


OPTIONS AVAILABLE WITH OVERHEAD SHELVES AND FOOD WARMER AND SPLASH BACK

Dawn

Multibarn



DAWN 1200 LTR.+1200 LTR. COMBI VERSION SPLIT			
MODEL	DAWN 1200 CLR	DAWN 1200 CHR	DAWN 1200 FZR
Overall Dimensions (W x D x H)-4D	3200 X 800 X 2100	3200 X 800 X 2100	3200 X 800 X 2100
Overall Dimensions (W x D x H)-2D	1600 X 800 X 2100	1600 X 800 X 2100	1600 X 800 X 2100
Usage Capacity in liters	1200 L	1200 L	1200 L
Racks size & Qty (W x D x Qty)-4D	550 X 580 X 20NOS	550 X 580 X 20NOS	550 X 580 X 20NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	2 TO 8 °C	0 TO -5 °C	-15 C TO -18 °C
Refrigerant	R-134 A	R-134 A	R-404 A
Defrost	AIR	HOT GAS	HOT GAS
Compressor	Kirloskar Copeland	Kirloskar Copeland	KCL / TECUMSEH / ASPARA
Condensing unit	REMOTE(2 nos)	REMOTE(2 nos)	REMOTE(2 nos)
Condensing unit (W x D x H)- each	850x650x540	850x650x540	1100x800x630
Connected Power	1550 WATT+	1575 WATT +	2000 WATT +
Amps.	5.8 A	6.2 A	7.2 A
Supply Voltage	230 VAC OR 440 VAC	230 VAC OR 440 VAC	230 VAC OR 440 VAC
Nett. Wt.	325KG	325KG	325KG
Packed Wt./ Gross Wt	400 KG	400 KG	400 KG

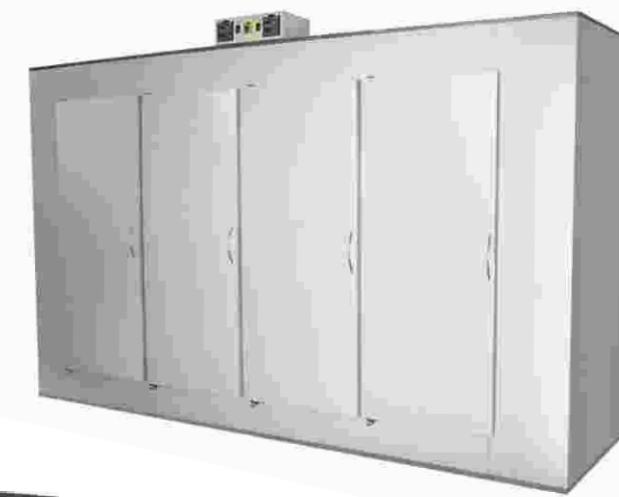

INTERNATIONALLY ACCEPTED QUALITY

CFC FREE REFRIGERATING SYSTEMS

VERSATILE DOOR OPTIONS

BUILT-IN AUTO DEFROST

FORCED INTERNAL AIR MOVEMENT

FROST FREE CONVENIENCE

SUITS DIVERSE PRODUCT STORAGE

COMPREHENSIVE SOLUTIONS FOR

RETAIL REFRIGERATED DISPLAY

AND STORAGE

COOLBARN™
For Freshness that's Real!
a RINAC Product



RINAC
RINAC INDIA LIMITED

Corporate & Administrative Office : #5 Saraswathi Nivas, Main Channel Road, Ulsoor, Bangalore - 560 008
Tel : 080 25542998 / 41132929 / 98 Fax : 080 25511750 e-mail : rilco@rinac.com/rinac@vsnl.com www.rinac.com

- ♦ **Ahmedabad** - Tel: 079- 26610189. E-mail: riahmedabad@rinac.com ♦ **Bangalore** - Tel: 080- 25238012. E-mail: rilbangalore@rinac.com
- ♦ **Chandigarh** - Tel: 0172- 5073580. E-mail: rilchandigarh@rinac.com ♦ **Chennai** - Tel: 044- 26616427. E-mail: rilchennai@rinac.com
- ♦ **Goa** - Tel: 0832- 2732089. ♦ **Hyderabad** - Tel: 040- 27753043. E-mail: rilhyderabad@rinac.com
- ♦ **Kochi** - Tel: 0484- 2206165. E-mail: rilkochi@rinac.com ♦ **Kolkata** - Tel: 033- 24863230. e-mail : rilkolkata@rinac.com
- ♦ **Mumbai** - Tel: 022- 25660719. E-mail: rilmumbai@rinac.com ♦ **New Delhi** - Tel: 011- 26346590. E-mail: rildelhi@rinac.com
- ♦ **Pune** - Tel: 020- 26120237. e-mail: rilpune@rinac.com

RINAC
RINAC INDIA LIMITED

Pride


Open Deck Chiller



COOLBARN - OPEN MULTIDECK CHILLERS WITH REMOTE CONDENSING UNIT			
MODEL	PRIDE (6 FT)	PRIDE (8 FT)	PRIDE (12 FT)
Dimensions (W x D x H)	1800 x 1000 x 2000	2400 x 1000 x 2000	3600 x 1000 x 2050
Colour Specification	Off white		
Illumination Type	Ballast lamps on canopy.		
No. of Racks	4 Adjustable display racks / shelves with lights under the shelves		
Air Curtain System	Provided		
Side Panels	Mirror/ Glass		
Insulation	60mm RPUF	60mm RPUF	60mm RPUF
Ambient Temperature	38 deg.C		
Temperature Range	2 to 8 deg.C		
Temperature Controller	Micro processor based controller with digital indicator		
Refrigerant (CFC free)	R 22/ R 134A		
Compressor	Hermetic / Copeland / Equivalent		
Power Requirement	3.0 kw	N3.5 kw	4.5 kw
Single Phase Option	Available	Available	-----
Product Stored	Fruits, Vegetables, Dairy Products & Beverages		
Net weight indoor unit	250	300	350
Condensing Unit size (W x D x H)	850 x 650 x 550/100kg	850 x 650 x 60/115kg	950 x 650 x 650/130kg



COOLBARN - OPEN MULTIDECK CHILLERS/PLUG-IN TYPE		
MODEL	PRIDE (4 FT)	PRIDE (6 FT)
Dimensions (W x D x H)	1200 x 1000 x 2000	1800 x 1000 x 2000
Colour Specification	Off white	
Illumination Type	Ballast lamps on canopy.	
No. of Racks	4 Adjustable display racks / shelves with lights under the shelves	
Air Curtain System	Provided	
Side Panels	Mirror/ Glass	
Insulation	60mm RPUF	60mm RPUF
Ambient Temperature	38 deg.C	
Temperature Range	2 to 8 deg.C	
Temperature Controller	Micro processor based controller with digital indicator	
Refrigerant (CFC free)	R 22/ R 134A	
Compressor	Hermetic / Copeland / Equivalent	
Power Requirement	3.0 kw	N3.5 kw
Single Phase Option	Available	Available
Product Stored	Fruits, Vegetables, Dairy Products & Beverages	
Net weight indoor unit	350	400
Condensing Unit size (w x d x h)	Built-in	Built-in

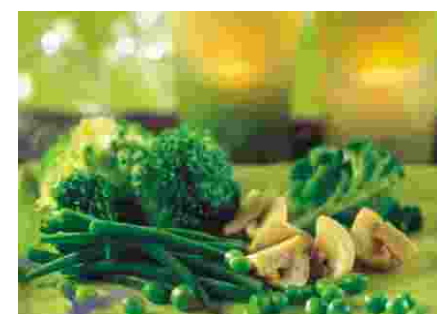

Sapphire

VISI-Coolers



SAPPHIRE 600 LTR.			
MODEL	SAPPHIRE 600 CLR.	SAPPHIRE 600 CHR.	SAPPHIRE 600 FZR.
Overall Dimensions (W x D x H)	810 X 800 X 2100	810 X 800 X 2100	810 X 800 X 2100
Usage Capacity	475 L	475 L	475L
Racks size & Qty (W x D x Qty)	480 X 580 X 4 NOS	480 X 580 X 4 NOS	480 X 580 X 4 NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	2 TO 8 °C	0 TO -5 °C	-15 C TO -18 °C
Refrigerant	R-134 A	R-134 A	R -404 A
Defrost	AIR	HOT GAS	HOT GAS
Compressor	Kirloskar Copeland	Kirloskar Copeland	Kirloskar Copeland
Condensing Unit	Plug-in	Plug-in	Plug-in
Connected Power	600 WATT	750 WATT	800 WATT
Amps.	3.3 A	3.8A	4.2 A
Supply Voltage	230 V AC	230 V AC	230 V AC
Nett. Wt.	125KG	125KG	125 KG
Packed Wt./ Gross Wt.	168 KG	168 KG	168 KG
Racks	Perforated Powder Coated /PVC wire frame		



SAPPHIRE 1000 LTR.			
MODEL	SAPPHIRE 1000 CLR.	SAPPHIRE 1000 CHR.	SAPPHIRE 1000 FZR.
Overall Dimensions (W x D x H)	1450 X 800 X 2100	1450 X 800 X 2100	1450 X 800 X 2100
Usage Capacity	1000 L	1000 L	1000 L
Racks Size & Qty (W x D x Qty)	480 X 580 X 8 NOS	480 X 580 X 8 NOS	480 X 580 X 8 NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	2 TO 8 °C	0 TO -5 °C	-15 C TO -18 °C
Refrigerant	R-134 A	R-134 A	R -404 A
Defrost	AIR	HOT GAS	HOT GAS
Compressor	Kirloskar Copeland	Kirloskar Copeland	Kirloskar Copeland
Condensing Unit	Plug-in	Plug-in	Plug-in
Connected Power	800 WATT	850 WATT	1220 WATT
Amps.	4.8 A	5.2 A	6.6 A
Supply Voltage	230 VAC	230 VAC	230 VAC
Nett. Wt.	185KG	185KG	185KG
Packed Wt./ Gross Wt.	220 KG	220 KG	220 KG
Racks	Perforated Powder Coated /PVC wire frame		



SAPPHIRE 2000 LTR.			
MODEL	SAPPHIRE 2000. CLR.	SAPPHIRE 2000. CHR	SAPPHIRE 2000. FZR
Overall Dimensions (W x D x H)	2050 X 800 X 2100	2050 X 800 X 2100	2050 X 800 X 2100
Usage Capacity	1880 L	1880 L	1880 L
Racks Size & Qty (W x D x H)	580 X 580 X 12NOS	580 X 580 X 12NOS	580 X 580 X 12NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	2 TO 8 °C	0 TO -5 °C	(-15 °C TO -18 °C)
Refrigerant	R-134 A	R-134 A	R -404 A
Defrost	AIR	HOT GAS	HOT GAS
Compressor	Kirloskar Copeland	Kirloskar Copeland	KCL/TECUMSEH/ASPORA
Condensing unit	PLUG IN	PLUG IN	PLUG IN
Connected Power	2000 WATT	2200 WATT	2200 WATT
Amps.	5.8 A	6.2 A	7.2 A
Supply Voltage	230 VAC	230 VAC	230 VAC
Nett. Wt.	225KG	225KG	225KG
Packed Wt./ Gross Wt	295 KG	295 KG	295 KG
Racks	Perforated Powder Coated /PVC wire frame		

Sapphire

Backend Chill/Frozen Reach-ins

SAPPHIRE 600 LTR.			
MODEL	SAPPHIRE 600 CLR.	SAPPHIRE 600 CHR.	SAPPHIRE 600 FZR.
Overall Dimensions (W x D x H)	810 X 800 X 2100	810 X 800 X 2100	810 X 800 X 2100
Usage Capacity	475 L	475 L	475L
Racks Size & Qty (W x D x Qty)	480 X 580 X 4 NOS	480 X 580 X 4 NOS	480 X 580 X 4 NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	2 TO 8 °C	0 TO -5 °C	-15 C TO -18 °C
Refrigerant	R-134 A	R-134 A	R -404 A
Defrost	AIR	HOT GAS	HOT GAS
Compressor	Kirloskar Copeland	Kirloskar Copeland	Kirloskar Copeland
Condensing Unit	Plug-in	Plug-in	Plug-in
Connected Power	600 WATT	750 WATT	800 WATT
Amps.	3.3 A	3.8 A	4.2 A
Supply Voltage	230 V AC	230 V AC	230 V AC
Nett. Wt.	125KG	125KG	125 KG
Packed Wt./ Gross Wt	168 KG	168 KG	168 KG
Racks	Perforated Powder Coated /PVC wire frame		



SAPPHIRE 1000 LTR.			
MODEL	SAPPHIRE 1000 CLR.	SAPPHIRE 1000 CHR.	SAPPHIRE 1000 FZR.
Overall Dimensions (W x D x H)	1450 X 800 X 2100	1450 X 800 X 2100	1450 X 800 X 2100
Usage Capacity	1000 L	1000 L	1000 L
Racks Size & Qty (W x D x Qty)	480 X 580 X 8 NOS	480 X 580 X 8 NOS	480 X 580 X 8 NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	2 TO 8 °C	0 TO -5 °C	-15 C TO -18 °C
Refrigerant	R-134 A	R-134 A	R -404 A
Defrost	AIR	HOT GAS	HOT GAS
Compressor	Kirloskar Copeland	Kirloskar Copeland	Kirloskar Copeland
Condensing Unit	Plug-in	Plug-in	Plug-in
Connected Power	800 WATT	850 WATT	1220 WATT
Amps.	4.8 A	5.2 A	6.6 A
Supply Voltage	230 VAC	230 VAC	230 VAC
Nett. Wt.	185 KG	185 KG	185 KG
Packed Wt./ Gross Wt.	220 KG	220 KG	220 KG
Racks	Perforated Powder Coated /PVC wire frame		



SAPPHIRE 2000 LTR.			
MODEL	SAPPHIRE 2000. CLR.	SAPPHIRE 2000. CHR	SAPPHIRE 2000. FZR
Overall Dimensions (W x D x H)	2050 X 800 X 2100	2050 X 800 X 2100	2050 X 800 X 2100
Usage Capacity	1880 L	1880 L	1880 L
Racks Size & Qty (W x D x H)	580 X 580 X 12NOS	580 X 580 X 12NOS	580 X 580 X 12NOS
Door Option	VISI / PANEL	VISI / PANEL	VISI / PANEL
Temp. Range	2 TO 8 °C	0 TO -5 °C	(-15 °C TO -18 °C)
Refrigerant	R-134 A	R-134 A	R -404 A
Defrost	AIR	HOT GAS	HOT GAS
Compressor	Kirloskar Copeland	Kirloskar Copeland	KCL/TECUMSEH/ASPORA
Condensing unit	PLUG IN	PLUG IN	PLUG IN
Connected Power	2000 WATT	2200 WATT	2200 WATT
Amps.	5.8 A	6.2 A	7.2 A
Supply Voltage	230 VAC	230 VAC	230 VAC
Nett. Wt.	225KG	225KG	225KG
Packed Wt./ Gross Wt	295 KG	295 KG	295 KG
Racks	Perforated Powder Coated /PVC wire frame		

